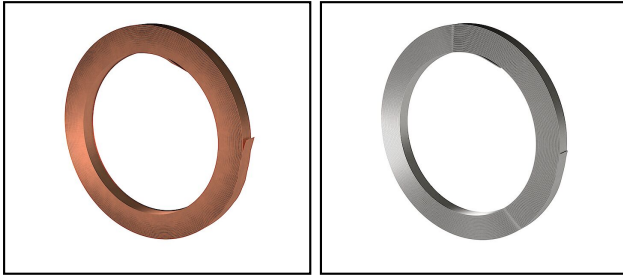









## Conductor material flat

■ **LF 2** Strip**Characteristics**

Price on application (current daily price)

**Legend**a) Hot-galvanized 225gr/m<sup>2</sup>b) Hot-galvanized 500gr/m<sup>2</sup>, use under reserve in the ground

Article-Nr.	E-Number									
215.003.220	100 732 270	ok	Cu	20x2.5	50				56	25
265.054.000	100 732 325	ok	Cu	25x3	75				45	30
265.050.000	100 732 330	ok	Cu	30x3	90				37	30
265.048.000	100 732 240	ok	Cu	40x3	120				28	30
265.072.000	100 779 450	ok	Cu	50x4	200				17	30
215.005.220	100 735 270	ok	CuSn	20x2.5	50				56	25
261.028.000	100 766 325		St	25x3	75				85	50
261.021.410	100 766 330		St	30x3	90				35	25
261.021.407	100 757 324		StvZn	25x3	75			a)	48	30
261.021.408	100 759 330		StvZn	30x3	90			b)	40	30
261.021.409	100 759 340		StvZn	40x3	120			b)	32	30
260.067.030	100 799 380	ok	InoxA4	30x3.5	105				36	30
260.067.050	100 799 250	ok	InoxA4	50x2	100				38	30

Technical Specifications: **Strip LF 2**

	215.003.220	265.054.000	265.050.000	265.048.000
Suitable for use in soil	ok			
Material	Cu			
Band size	20x2.5 mm	25x3 mm	30x3 mm	40x3 mm
Band section	50 mm <sup>2</sup>	75 mm <sup>2</sup>	90 mm <sup>2</sup>	120 mm <sup>2</sup>
Cross section	50 mm <sup>2</sup>	75 mm <sup>2</sup>	90 mm <sup>2</sup>	120 mm <sup>2</sup>
Surface protection	unbehandelt			
Thickness	2.5 mm	3 mm		
Commercial specification				
Customs number	74091100			74071000
country of origin	ZA*			
Logistic specification				
VPE Weight	25 kg	30 kg		

	265.072.000	215.005.220	261.028.000	261.021.410
Suitable for use in soil	ok			
Material	Cu	CuVSn	St	
Band size	50x4 mm	20x2.5 mm	25x3 mm	30x3 mm
Band section	200 mm <sup>2</sup>	50 mm <sup>2</sup>	75 mm <sup>2</sup>	90 mm <sup>2</sup>
Cross section	200 mm <sup>2</sup>	50 mm <sup>2</sup>	75 mm <sup>2</sup>	90 mm <sup>2</sup>
Surface protection	unbehandelt	Other	unbehandelt	
Thickness	4 mm	2.5 mm	3 mm	
Commercial specification				
Customs number	74091100		72111900	
country of origin	ZA*	CH	ZA*	
Logistic specification				
VPE Weight	30 kg	25 kg	50 kg	

	261.021.407	261.021.408	261.021.409	260.067.030
Suitable for use in soil	ok			
Material	StvZn			InoxA4
Band size	25x3 mm	30x3 mm	40x3 mm	30x3.5 mm
Band section	75 mm <sup>2</sup>	90 mm <sup>2</sup>	120 mm <sup>2</sup>	105 mm <sup>2</sup>
Cross section	75 mm <sup>2</sup>	90 mm <sup>2</sup>	120 mm <sup>2</sup>	105 mm <sup>2</sup>
Surface protection	Hot dip galvanized			unbehandelt
Thickness	3 mm			3.5 mm
Commercial specification				
Customs number	72119000			72223000
country of origin	ZA*			CE*
Logistic specification				
VPE Weight	30 kg			

	260.067.050			
Suitable for use in soil	ok			
Material	InoxA4			
Band size	50x2 mm			
Band section	100 mm <sup>2</sup>			
Cross section	100 mm <sup>2</sup>			
Surface protection	unbehandelt			
Thickness	2 mm			
Commercial specification				
Customs number	72223000			
country of origin	ZA*			
Logistic specification				
VPE Weight	30 kg			

