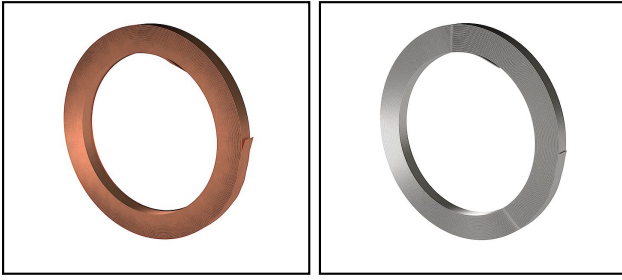


## Conductor material flat

### LF 2 Strip










#### Characteristics

Price on application (current daily price)

#### Legend

a) Hot-galvanized 225gr/m<sup>2</sup>

b) Hot-galvanized 500gr/m<sup>2</sup>, use under reserve in the ground

Article-Nr.	E-Number									
261.021.409	100 759 340		StvZn	40x3	120			b)	32	30

Technical Specifications: **Strip LF 2**

Article No.	261.021.409
<b>Material</b>	StvZn
<b>Band size</b>	40x3
<b>Band section</b>	120 mm <sup>2</sup>
<b>Cross section</b>	120 mm <sup>2</sup>
<b>Surface protection</b>	Hot dip galvanized
<b>Thickness</b>	3 mm
<b>comment</b>	b)
Commercial specification	
<b>Customs number</b>	72119000
<b>country of origin</b>	ZA*
Texte	
<b>comment</b>	b)
Logistic specification	
<b>VPE Weight</b>	30 kg