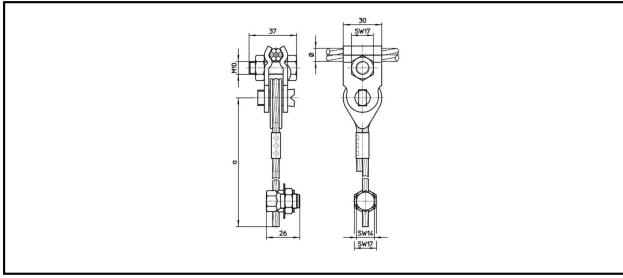


Suspension accessories

TSH1VK









Application

For the suspension of the section insulators with turnbuckles, clamp type FRL 7 and dropper clamp type SKTF1.

Material

Dropper clamp CuNiSi
 Dropper wire BzII
 Clamp Ms90
 Thimble PA
 Compression sleeve Cu

Article-Nr.	 mm Ø	 mm	 mm a	 mm ²	 kN				 Kg
625.436.142	6.5 - 13	50 - 95	1800	10	1.5				0.34
625.435.142	6.5 - 13	50 - 95	3000	10	1.5				0.452
625.438.142	12.5 - 17.5	95 - 185	1800	10	1.5				0.35

Technical Specifications: **TSH1VK**

	625.436.142	625.435.142	625.438.142
Length a	1800 mm	3000 mm	1800 mm
Catenary wire diameter	6.5 - 13 mm		12.5 - 17.5 mm
Catenary wire section	50 - 95 mm ²		95 - 185 mm ²
Dropper wire section	10 mm ²		
Slipping force	1.5 kN		
Starting torque	20 N·m		
Commercial specification			
Customs number	85359000		
country of origin	CH		
Logistic specification			
Kilo / piece	0.34 kg	0.452 kg	0.35 kg

