








Down-conductor components

■ **AL 8** Test isolating joint parallel

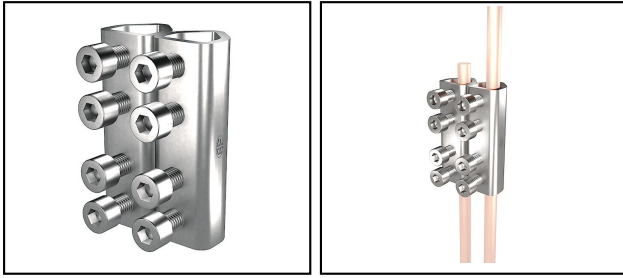

Characteristics

Test isolating joint for three conductors on buildings with isolated foundations.

Article-Nr.	E-Number									
270.025.004	156 831 420	H	InoxA2	M6x16	6 - 11	25 - 95				25

Technical Specifications: **Test isolating joint parallel AL 8**

Article No.	270.025.004
Approved class H / N (EN 62561-1)	H
Material	InoxA2
Screw	M6x16
Wire diameter	6 - 11 mm
Nominal cross section conductor	25 - 95 mm ²
Surface protection	unbehandelt
Suitable for connection	Round 7-10
Bimetal connector	No
required torque	6 N·m
Commercial specification	
Customs number	85389000
country of origin	CH
Logistic specification	
VPE Weight	4.46 kg

