


Pendules à câble

■ SHZR

**Application**



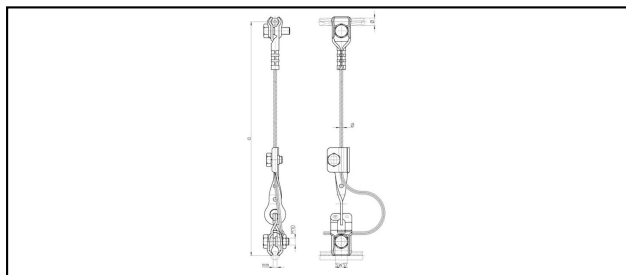




Suspension pour fil de contact, équipotentiel

Description

Autres longueurs et rainures du fil de contact sur demande

Matériel

Cosse en CuNiSi/Inox, pièce réglable Inox, câble Inox

Réf. article		 mm Ø	 mm²	 mm Ø	 kN	 mm a			 Kg
625.628.016	50 - 95	9 - 12.5	10	4.5	3	1600			0.465
625.628.022	50 - 95	9 - 12.5	10	4.5	3	2200			0.521
625.628.028	50 - 95	9 - 12.5	10	4.5	3	2800			0.577
625.628.040	50 - 95	9 - 12.5	10	4.5	3	4000			0.688

Caractéristiques techniques: **SHZR**

	625.628.016	625.628.022	625.628.028	625.628.040
Section câble porteurs	50 - 95 mm ²			
Diamètre câble porteur	9 - 12.5 mm			
Section fil de suspension	10 mm ²			
Longueur a	1600 mm	2200 mm	2800 mm	4000 mm
Diamètre fil de suspension	4.5 mm			
Force de glissade	3 kN			
Spécifications commerciales				
Numéro de tarif douanier	85359000		0	
pays d'origine	CH		indéfini	
Spécifications logistiques				
Kilo / pièce	0.465 kg	0.521 kg	0.577 kg	0.688 kg