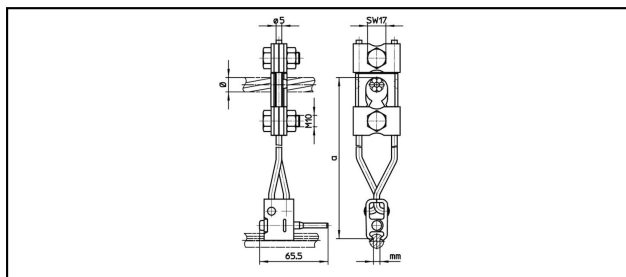


## Pendules à fil

■ **DHF9H** Pendule à fil avec pièce d'arrêt**Application**






Suspension pour fil de contact, non-équipotentiel

**Description**

Couple de serrage 12-15 Nm

**Matériel**

Corps CuNiSi / Cable Cu

Réf. article									
625.519.000	50 - 150	9 - 15.7	5.6	5	125 - 285				0.38
625.518.000	50 - 150	9 - 15.7	5.6	5	125 - 485				0.45
625.510.000	50 - 150	9 - 15.7	5.6	5	125 - 750				0.547
625.403.732	50 - 150	9 - 15.7	5.6	5	125 - 1500				0.81

Caractéristiques techniques: **Pendule à fil avec pièce d'arrêt DHF9H**

	625.519.000	625.518.000	625.510.000	625.403.732
<b>Longueur a</b>	125 - 285 mm	125 - 485 mm	125 - 750 mm	125 - 1500 mm
<b>Section câble porteurs</b>	50 - 150 mm <sup>2</sup>			
<b>Diamètre câble porteur</b>	9 - 15.7 mm			
<b>Rainure du fil de contact</b>	5.6 mm			
<b>Force de glissade</b>	5 kN			
Spécifications commerciales				
<b>Numéro de tarif douanier</b>	85359000			
<b>pays d'origine</b>	CH			
Spécifications logistiques				
<b>Kilo / pièce</b>	0.38 kg	0.45 kg	0.547 kg	0.81 kg