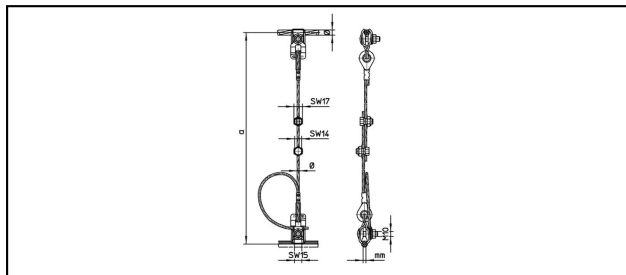


Pendules à câble

■ SHTF5,1/10V








**Application**

Suspension pour fil de contact, non-équipotentiel

Matériel

Borne en CuNiSi / Inox / Cordage Bz 2 / Cosse plastique

Application

Réf. article									
625.590.201	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.203	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.204	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		

Caractéristiques techniques: **SHTF5,1/10V**

	625.590.201	625.590.203	625.590.204
Diamètre câble porteur	9 - 13 mm		
Section câble porteurs	50 - 95 mm ²		
Rainure du fil de contact	5.5 - 7 mm		
Diamètre fil de suspension	4.5 mm		
Section fil de suspension	10 mm ²		
Force de glissade	3 kN		
Longueur a	750 - 2300 mm		
Spécifications commerciales			
Numéro de tarif douanier	85359000		
pays d'origine	indéfini	CH	