


Pendini



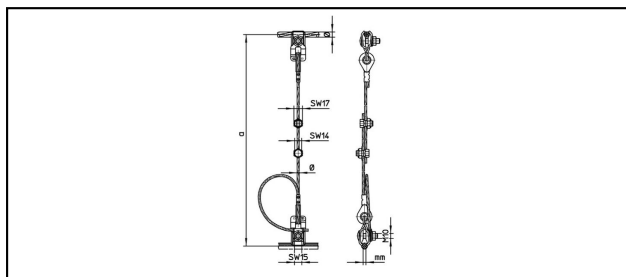




■ SHTF5,1/10V

**Applicazione**

Sospensione per filo di contatto, non equipotenziale

Materiale

Morsetto in CuNiSi / Cordino in Bz 2 / Redancia in plastica

Rif. Articolo									
625.590.201	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.203	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.204	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		

Specifiche tecnici: **SHTF5,1/10V**

	625.590.201	625.590.203	625.590.204
Diametro funi portanti	9 - 13 mm		
Sezione funi portanti	50 - 95 mm ²		
Sagomatura filo di contatto	5.5 - 7 mm		
Diametro del filo di sospensione	4.5 mm		
Sezione del filo di sospensione	10 mm ²		
Forza di slittamento	3 kN		
Lunghezza a	750 - 2300 mm		
Specifiche commerciali			
Numero di tariffa doganale	85359000		
paese di origine	ZA*	CH	

