


## Foundation earthing components








### ■ FE 43 Clamp

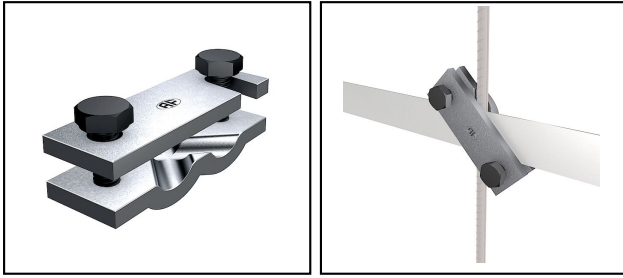

#### Characteristics

Cross connector 30x3mm, suitable for parallel connections up to 50x3mm

Cross connector 50x3mm, suitable for parallel connections up to 80x3mm

Article-Nr.	E-Number									
281.095.000	156 940 110			St	M10x40	6 - 22	30x3			50
281.103.000	156 940 050			St	M10x60	6 - 26	30x3			25
281.109.000	156 940 620			St	M10x80	6 - 28	30x3			25
281.096.000	156 940 140			St	M10x40	6 - 22	50x3			25
281.096.010	156 940 640			St	M10x60	6 - 26	50x3			25
280.000.002	156 940 270	H	ok	InoxA4	M10x40	6 - 22	30x3			50
270.049.000	156 941 270	H	ok	InoxA4	M10x40	6 - 22	50x3			25

Technical Specifications: **Clamp FE 43**

	281.095.000	281.103.000	281.109.000	281.096.000
<b>Approved class H / N (EN 62561-1)</b>				
<b>Suitable for use in soil</b>				
<b>Material</b>	St			
<b>Screw</b>	M10x40	M10x60	M10x80	M10x40
<b>Wire diameter</b>	6 - 22 mm	6 - 26 mm	6 - 28 mm	6 - 22 mm
<b>Band size</b>	30x3 mm			50x3 mm
<b>Type of fastening screws</b>	Hexagon screw			
<b>Type of connector</b>	Access-clip			
<b>Suitable for diameter round conductor</b>	6 - 22 mm	6 - 26 mm	6 - 28 mm	6 - 22 mm
<b>Surface protection</b>	untreated			
<b>required torque</b>	25 N·m			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000		35659080	85389000
<b>country of origin</b>	CH			
<b>Logistic specification</b>				
<b>VPE Weight</b>	14.8 kg	7.89 kg	8.4 kg	12 kg

	281.096.010	280.000.002	270.049.000	
<b>Approved class H / N (EN 62561-1)</b>			H	
<b>Suitable for use in soil</b>			ok	
<b>Material</b>	St		InoxA4	
<b>Screw</b>	M10x60		M10x40	
<b>Wire diameter</b>	6 - 26 mm		6 - 22 mm	
<b>Band size</b>	50x3 mm	30x3 mm	50x3 mm	
<b>Type of fastening screws</b>	Hexagon screw			
<b>Type of connector</b>	Access-clip			
<b>Suitable for diameter round conductor</b>	6 - 26 mm		6 - 22 mm	
<b>Surface protection</b>	untreated			
<b>required torque</b>	25 N·m			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CH			
<b>Logistic specification</b>				
<b>VPE Weight</b>	12.42 kg	14.63 kg	12.2 kg	