


Generators combiner boxes

GAK 212 PG Coarse and middle protection PV GAK+DIS50 PVS-1000-4ST-2MPP




Characteristics

Generator boxes with preassembled surge protection and grounding plate:

Legend

- a) type 1+2 GAK + DIS 60 VGPVS-1000-4ST-2MPP
- b) type 1+2 GAK + DIS 50 PVS-1000-4ST-2MPP
- c) type 1+2 GAK + DIS 50 VGPVS-1000-4ST-2MPP
- d) type 2 GAK + DIS 50 PV-1000-4ST-2MPP

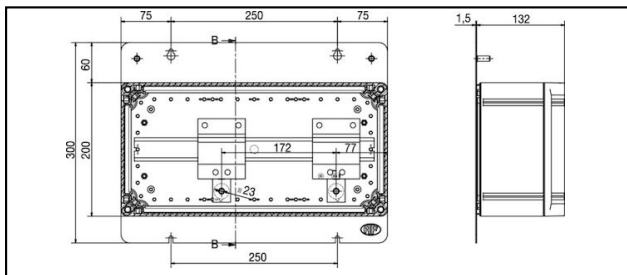

Article-Nr.	E-Number	Typ/Type	V U _C	kA I _{imp}	kA I _{max}	ns t _A	kV U _P	mm ²		VE Emb.
296.049.957	969 111 714	T1 / T2	≤1200VDC	6.25	40	≤25	2.6	2.5 - 25	b)	1

Technical Specifications: Coarse and middle protection PV GAK+DIS50 PVS-1000-4ST-2MPP GAK 212 PG

Article No.	296.049.957
SPD type	T1 / T2
Number of poles	2
max. discharge current (I _{max})	40 kA
Nominal line voltage Un DC	1000 V
Impulse current [I _{imp}]_(10/350)	6.25 kA
Nominal discharge surge current (8/20)	15 kA
Voltage protection level [Up]	2.6 kV
Operation voltage max. [Uc]	≤1200VDC
Follow current [IF]	0 kA
Response time [ta]	≤25
Short circuit resistance (I _{cw})	1 kA
Fault indication	mechanisch, Rot
Total discharge current (8/20) (L N-PE)	60 kA
Temperature range	-40 - 85
Signaling on the device	Optic
Signaling contact	Yes
Connection cross section solid / stranded max.	1.5 mm ²
Switching capacity signaling contact	250 V/0,5 A (AC) / - 30 V / 2 A (DC)
Energetically coordinated protective effect to the terminal	Yes
System configuration DC	Yes
Construction size	3 modular spacing
Nominal discharge current [In]	15/Pol
Nominal cross section conductor	2.5 - 25 mm ²
Integrated backup fuse	No
Exhausting	No
Mounting method	DIN rail (top hat rail) 35 mm
Degree of protection (IP)	IP20
Casing	
degree of protection	IP65
number of modules	20
contract rail	DIN-Schiene
String / MPP	4ST-2MPP
inputs PG / MC4	PG
outputs PG / MC4	PG
Ground base plate	Yes
Switch	
Switching capacity voltage max. U _{oc} Max.	1000 V
Switching current max. I _{sc} Max.	30 A
Cross-sectional area	6 mm ²
Standards	
Test standards USA	UL 1449 ed.3
Test standards Europe	EN 50539-11
Test standards France	UTE C61-740-51
comment	
comment	b)
Commercial specification	
Customs number	85372000
country of origin	CH
Texte	
comment	b)
Logistic specification	
VPE Weight	5.833 kg