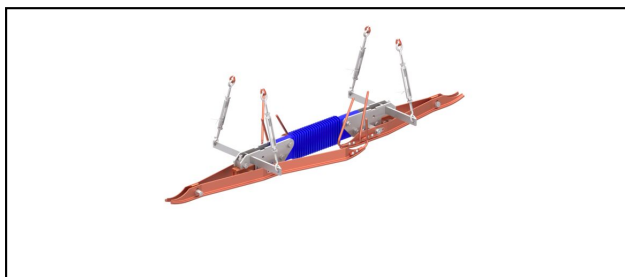


Section insulators

FD1.5 Section insulator



Application

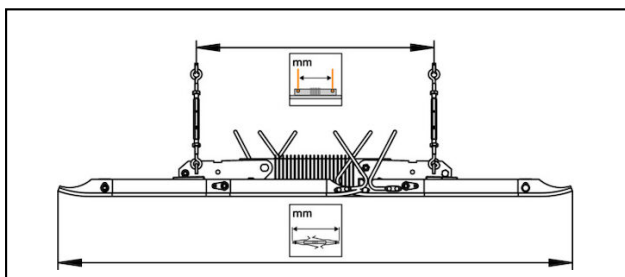
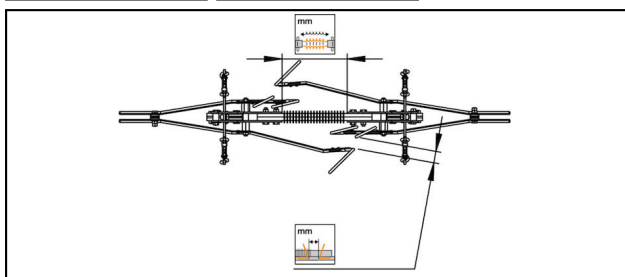
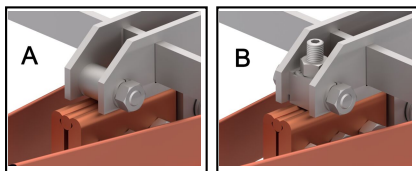
For tramway and light rail
Maximum speed up to 100 km/h










Material

GRP/silicone, Cu, CuNiSi, stainless steel




Legend

- 1) For 1 contact wire systems
- 2) For 2 contact wire systems
- A) Without adjusting screw for low service loads
- B) With adjusting screw for high service loads







Article-Nr.									
655.336.705	100 - 152	5.6 - 6.9	450	610	435	35	1320	max.10	1, A

Accessories

 MH FS/FD/FO									
Article-Nr.									
690.070.000								24.7	1
655.300.000								2.8	2

Accessories






 SAL									
Article-Nr.									
696.016.010	AI	1610							1.2



Accessories



Turnbuckle SSCH200-280

Article-Nr.	mm 	mm 	mm 					Kg 	
690.010.727	200 - 280	15						0.163	1, 3
690.023.727	200 - 280	15						0.163	1, 2
690.025.727	200 - 280	18	8					0.163	1, 2
690.035.000	200 - 280	18	8					0.163	1, 3
690.038.000	200 - 280	18	8					0.163	1, 3, 4

Technical Specifications: **Section insulator FD1.5**

Article No.	655.336.705
Contact wire section	100 - 152 mm ²
Contact wire groove	5.6 - 6.9 mm
Creeping distance	450 mm
Length between suspension	610 mm
Length between contact wire	435 mm
Arcing horn distance	35 mm
Total length	1320 mm
Recommended service load	max.10
Specified mechanical load (SML)	80 kN
Minimum breaking load of the section insulator	80 kN
comment	
	1, A
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	1, A
Logistic specification	
Kilo / piece	13 kg

