
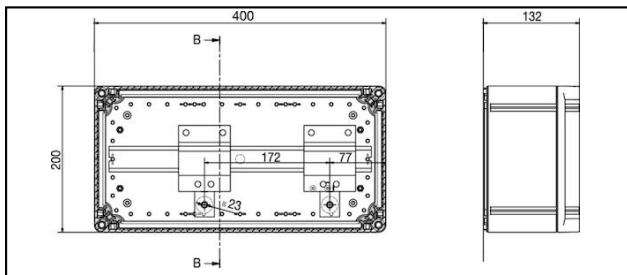


Generators combiner boxes

GAK 104 PG Junction box PV



Characteristics

Generator boxes with preassembled fuse holders and surge protection:

Legend

- a) type 1+2 GAK FUS 60 VGPVS-1000-4ST-1MPP
- b) type 1+2 GAK FUS 50 PVS-1000-4ST-1MPP
- c) type 1+2 GAK FUS 50 VGPVS-1000-4ST-1MPP
- d) type 2 GAK FUS 50 PV-1000-4ST-1MPP

Article-Nr.	E-Number	Typ/Type	V U _C	kA I _{imp}	kA I _{max}	ns t _A	kV U _P	mm ²		VE Emb.
296.154.216	969 112 504	T1 / T2	≤1200VDC	12.5	40	≤25	2.8	6 - 35	a)	1
296.154.816	969 112 564	T1 / T2	≤1200VDC	6.25	40	≤25	2.6	2.5 - 25	b)	1
296.154.416	969 112 524	T1 / T2	≤1200VDC	6.25	40	≤25	2.8	2.5 - 25	c)	1
296.154.616	969 112 544	T2	≤1200VDC	5	40	≤25	2.6	2.5 - 25	d)	1

Technical Specifications: Junction box PV GAK 104 PG

	296.154.216	296.154.816	296.154.416	296.154.616
SPD type	T1 / T2			T2
Number of poles	2			
max. discharge current (I _{max})	40 kA			
Nominal line voltage U _n DC	1000 V			
Impulse current [I _{imp}] (10/350)	12.5 kA	6.25 kA		5 kA
Discharge current max. (8/20) μs [I _{max}]	40 kA		60 kA	
Nominal discharge surge current (8/20)	20 kA	15 kA		15 kA
Voltage protection level [U _p]	2.8 kV	2.6 kV	2.8 kV	2.6 kV
Protection level max. (at 5kA)	2.1 kV			
Protection level max. (at 12.5kA)	2.3 kV			
Operation voltage max. [U _c]	≤1200VDC			
Operating current [I _c]	0 kA		0 kA	
Follow current [I _F]	0 kA			
follow current extinguishing capability [I _{fi}]	Unendlich kA eff		Unendlich kA eff	
Response time [t _a]	≤25 ns			
Short circuit resistance (I _{cw})	25 kA	1 kA	10 kA	1 kA
Fault indication	Mechanisch, Rot	mechanisch, Rot	Mechanisch, Rot	mechanisch, Rot
Temperature range	-40 - 85			
Total discharge current (8/20) (L N-PE)		60 kA		60 kA
Degree of protection	IP20			
Signaling on the device	Optic			
Signaling contact	Yes			
Connection cross section solid / stranded max.	1.5 mm ²			
Switching capacity signaling contact	250 V / 0,5 A (AC) - 30 V / 2 A (DC)	250 V / 0,5 A (AC) / - 30 V / 2 A (DC)	250 V / 0,5 A (AC) - 30 V / 2 A (DC)	250 V / 0,5 A (AC) / - 30 V / 2 A (DC)
Energetically coordinated protective effect to the terminal	Yes			
System configuration DC	Yes			
Construction size	4 modular spacing	3 modular spacing		
Nominal discharge current [I _n]	20/Pol	15/Pol		
Nominal cross section conductor	6 - 35 mm ²	2.5 - 25 mm ²	2.5 - 25	2.5 - 25 mm ²
Integrated backup fuse	No			
Exhausting	No			
Mounting method	DIN rail (top hat rail) 35 mm			
Degree of protection (IP)	IP20			
Casing				
degree of protection	IP65			
number of modules	20			
contract rail	DIN-Schiene			
String / MPP	4ST-1MPP			
inputs PG / MC4	PG			
outputs PG / MC4	PG			
Standards				
Test standards USA	UL 1449 ed.3			
Test standards Europe	FprEN 50539-11	EN 50539-11		
Test standards France	UTE C61-740-51			
Homologation	VDE, ÖVE und UL		VDE, ÖVE und UL	
Commercial specification				
Customs number	85372000			
country of origin	CH			