


Generators combiner boxes

GAK 104 PG Junction box PV GAK FUS 50 PVS-1000-4ST-1MPP




Characteristics

Generator boxes with preassembled fuse holders and surge protection:

Legend

- a) type 1+2 GAK FUS 60 VGPVS-1000-4ST-1MPP
- b) type 1+2 GAK FUS 50 PVS-1000-4ST-1MPP
- c) type 1+2 GAK FUS 50 VGPVS-1000-4ST-1MPP
- d) type 2 GAK FUS 50 PV-1000-4ST-1MPP

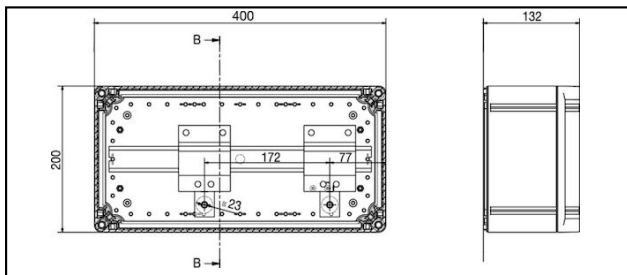

Article-Nr.	E-Number	Typ/Type	V U _C	kA I _{imp}	kA I _{max}	ns t _A	kV U _P	mm ²		VE Emb.
296.154.816	969 112 564	T1 / T2	≤1200VDC	6.25	40	≤25	2.6	2.5 - 25	b)	1



Technical Specifications: Junction box PV GAK FUS 50 PVS-1000-4ST-1MPP GAK 104 PG

Article No.	296.154.816
SPD type	T1 / T2
Number of poles	2
max. discharge current (I _{max})	40 kA
Nominal line voltage U _n DC	1000 V
Impulse current [I _{imp}]_(10/350)	6.25 kA
Nominal discharge surge current (8/20)	15 kA
Voltage protection level [U _p]	2.6 kV
Operation voltage max. [U _c]	≤1200VDC
Follow current [I _F]	0 kA
Response time [t _a]	≤25
Short circuit resistance (I _{cw})	1 kA
Fault indication	mechanisch, Rot
Total discharge current (8/20) (L N-PE)	60 kA
Temperature range	-40 - 85
Signaling on the device	Optic
Signaling contact	Yes
Connection cross section solid / stranded max.	1.5 mm ²
Switching capacity signaling contact	250 V/0,5 A (AC) / - 30 V / 2 A (DC)
Energetically coordinated protective effect to the terminal	Yes
System configuration DC	Yes
Construction size	3 modular spacing
Nominal discharge current [I _n]	15/Pol
Nominal cross section conductor	2.5 - 25 mm ²
Integrated backup fuse	No
Exhausting	No
Mounting method	DIN rail (top hat rail) 35 mm
Degree of protection (IP)	IP20
Casing	
degree of protection	IP65
number of modules	20
contract rail	DIN-Schiene
String / MPP	4ST-1MPP
inputs PG / MC4	PG
outputs PG / MC4	PG
Standards	
Test standards USA	UL 1449 ed.3
Test standards Europe	EN 50539-11
Test standards France	UTE C61-740-51
comment	b)
Commercial specification	
Customs number	85372000
country of origin	CH
Texte	
comment	b)