


Generators combiner boxes

■ GAK 310-MC4 Junction box PVGAK+50-1000-3ST-3MPP MC4




Characteristics

Generator boxes with preassembled surge protection and grounding plate:

Legend

- a) type 1+2 GAK + 60 VGPVS-1000-3ST-3MPP
- b) type 1+2 GAK + 50 PVS-1000-3ST-3MPP
- c) type 1+2 GAK + 50 VGPVS-1000-3ST-3MPP
- d) type 2 GAK + 50 PV-1000-3ST-3MPP

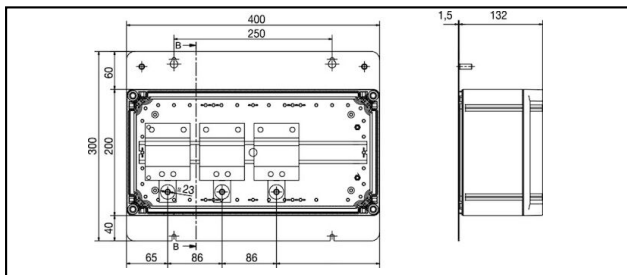

Article-Nr.	E-Number	Typ/Type	V U _C	kA I _{imp}	kA I _{max}	ns t _A	kV U _P	mm ²		VE Emb.
296.050.653	969 111 934	T2	≤1200VDC	5	40	≤25	2.6	2.5 - 25	d)	1

Technical Specifications: Junction box PVGAK+50-1000-3ST-3MPP MC4 GAK 310-MC4

Article No.	296.050.653
SPD type	T2
Number of poles	2
max. discharge current (I _{max})	40 kA
Nominal line voltage U _n DC	1000 V
Impulse current [I _{imp}]_(10/350)	5 kA
Nominal discharge surge current (8/20)	15 kA
Voltage protection level [U _p]	2.6 kV
Operation voltage max. [U _c]	≤1200VDC
Follow current [I _F]	0 kA
Response time [t _a]	≤25
Short circuit resistance (I _{cw})	1 kA
Fault indication	mechanisch, Rot
Total discharge current (8/20) (L N-PE)	60 kA
Temperature range	-40 - 85
Signaling on the device	Optic
Signaling contact	Yes
Connection cross section solid / stranded max.	1.5 mm ²
Switching capacity signaling contact	250 V/0,5 A (AC) / - 30 V / 2 A (DC)
Energetically coordinated protective effect to the terminal	Yes
System configuration DC	Yes
Construction size	3 modular spacing
Nominal discharge current [I _n]	15/Pol
Nominal cross section conductor	2.5 - 25 mm ²
Integrated backup fuse	No
Exhausting	No
Mounting method	DIN rail (top hat rail) 35 mm
Degree of protection (IP)	IP20
Casing	
degree of protection	IP65
number of modules	20
contract rail	DIN-Schiene
String / MPP	3ST-3MPP
inputs PG / MC4	MC 4
outputs PG / MC4	MC 4
Ground base plate	Yes
Standards	
Test standards USA	UL 1449 ed.3
Test standards Europe	EN 50539-11
Test standards France	UTE C61-740-51
comment	d)
Commercial specification	
Customs number	85372000
country of origin	CH
Texte	
comment	d)