
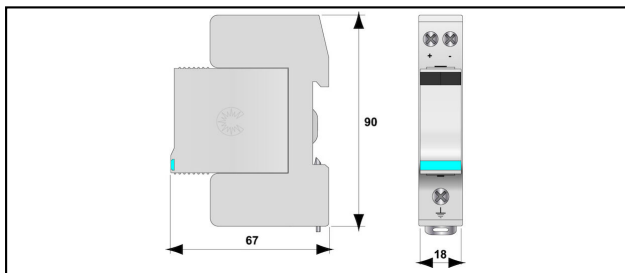






Surge protection (Type 3)

■ **DS 215** Overvoltage protection T3**Characteristics**

- surge protector type 3
- $I_n = 5\text{kA}$; $I_{\text{max}} = 15\text{kA}$
- internal disconnection, status indicator
- pluggable module
- remote signaling



Article-Nr.	E-Number	Typ/Type			kA I_{max}	ns t_A	kV U_P	mm ² 	kA i_n	
296.045.714	808 406 800	T3	2	Yes	15	≤20	0.9	1.5 - 10	5	1

Technical Specifications: **Overvoltage protection T3 DS 215**

	296.045.714
SPD type	T3
Number of poles	2
max. discharge current (I_{max})	15 kA
Nominal line voltage Un AC	230 V
Continuous voltage AC max.	250 V
Nominal frequency [fn]	50 - 60 Hz
Discharge current max. (8/20) μs [I_{max}]	15 kA
Nominal discharge surge current (8/20)	5 kA
Combined shock [Uoc]	10 kV
Voltage protection level [Up]	0.9 kV
Operating current [Ic]	0 kA
Follow current [IF]	0 kA
follow current extinguishing capability [Ifi]	unendlich kA eff
Response time [ta]	≤20 ns
TOV-voltage L-N [UT]	250 V / 5 sec.
TOV-voltage N-PE [UT]	1200 V / 300 A / 200ms fest
Short circuit resistance (I_{cw})	10 kA
Fault indication	Mechanisch, Rot
Temperature range	-40 - 85 °C
Degree of protection	IP20
Fuse max. (gG)	40 A
Mounting on	Hutschiene 35 mm
Signaling on the device	Optic
Signaling contact	Yes
Connection cross section solid / stranded max.	1.5 mm ²
Switching capacity signaling contact	250 V / 0,5 A (AC) - 30 V / 2 A (DC)
Nominal discharge surge current (8/20) (L-N)	5 kA
With interference suppressor filter	No
Nominal cross section conductor	1.5 - 10 mm ²
Discharge current max. [I_{max}]	30 kA
Total discharge current (8/20) (L N-PE)	15 kA
Mounting method	DIN rail (top hat rail) 35 mm
Category type 3	Yes
Nominal discharge current [In]	5/Pol
With remote signalling contact	Yes
Voltage protection level L-N [Up]	1.5 kV
Degree of protection (IP)	IP20
Construction size	1 modular spacing
Standards	
Homologation	VDE, ÖVE, UL
Test standards International	IEC 61643-11
Test standards USA	UL 1449 ed.3
Test standards Europe	EN 61643-11
Commercial specification	
Customs number	85363000
country of origin	undefined
Logistic specification	
VPE Weight	0.126 kg

