
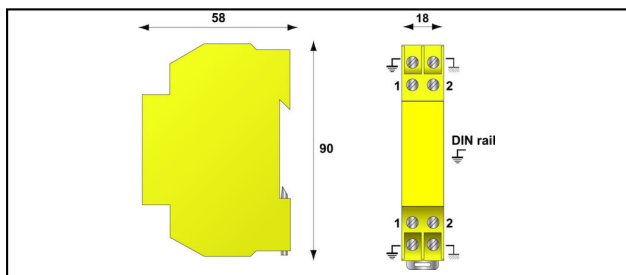





## Informatics, Telecommunication

■ **DLU** Surge protection**Characteristics**

Designed to protect, against surge voltages due to lightning, telecom lines. Based on gas-tube technology with fast switching diodes.

Article-Nr.	E-Number		v $U_N$	ns $t_A$	kV $U_P$	kA $I_{max}$	mm <sup>2</sup> 			 VE Emb
296.074.238	970 504 003	2	150	≤1	0.07	20	0.75 - 1.5			1

## Technical Specifications: Surge protection DLU

Article No.	296.074.238
Nominal voltage Un	150
Operating voltage max. [UcDC]	170 V
Nominal line voltage Un AC	150 V
Nominal line voltage Un DC	150 V
Continuous voltage AC max.	121 V
Signal critical frequency	10 MHz
Continuous voltage DC max.	170 V
Nominal load current	0.3 A
Voltage protection level [Up]	0.07 kV
Response time [ta]	≤1
Fault indication	Kurzschluss
Temperature range	-40 - 85 °C
Degree of protection	IP20
Dimensions	Siehe Massbild
Signaling on the device	None
Connection cross section solid / stranded max.	1.5 mm <sup>2</sup>
Nominal cross section conductor	0.75 - 1.5 mm <sup>2</sup>
Signal nominal load current	0.3 A
Signal - maximum continuous voltage AC	121 V
Nominal discharge current [In]	5
Discharge current max. [Imax]	20 kA
Connector (information technology)	Clamp
Mounting method	DIN rail (top hat rail) 35 mm
With remote signalling contact	No
Number of wires	2
Applications with interface	ISDN
Standards	
Homologation	UL
Test standards International	IEC 61643-21
Test standards USA	UL497A&B
Commercial specification	
Customs number	85363000
country of origin	undefined
Logistic specification	
VPE Weight	0.075 kg