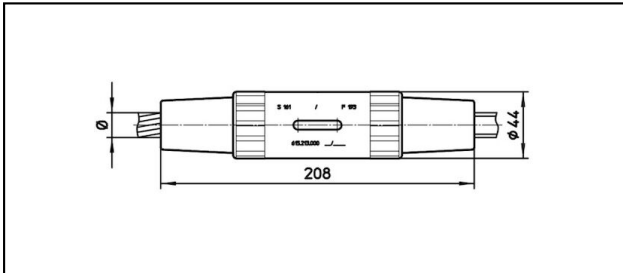


Giunto a cono

RV208

**Applicazione**

Conduttori in Cu, Cu-Acciaio o Bz sottoposti a tiro meccanico e corrente

Caratteristiche

Carico in esercizio min. 3 kN / max. 25 kN








Carico di rottura del corpo min. 80 kN

Materiale

Corpo CuNisi / Cono AlBz

Legenda

1) Codice colore

Rif. Articolo									
615.213.000	S161/F193	16.75	161	16.75	193			1.35	1
615.237.000	S181/S161	17.5 - 16.8	181 - 161					1.4	
615.212.000	S202/F193	18.75	202	16.75	193			1.35	1

Specifiche tecnici: **RV208**

	615.213.000	615.237.000	615.212.000
ferroviaria prodotto nome	S161/F193	S181/S161	S202/F193
Diametro funi portanti	16.75 mm	17.5 - 16.8 mm	18.75 mm
Sezione funi portanti	161 mm ²	181 - 161 mm ²	202 mm ²
Diametro filo di contatto	16.75 mm		16.75 mm
Sezione filo di contatto	193 mm ²		193 mm ²
Specifiche commerciali			
Numero di tariffa doganale	85359000		
paese di origine	CH		
Specificazione logistica			
Chilo / pezzo	1.35 kg	1.4 kg	1.35 kg

